Infrared Receiver Module

HX1838

SIVAGO® SEMICONDUCTOR

Features

Very low supply current

Photo detector and preamplifier in one package

Internal filter for PCM frequency

Improved shielding against EMI

Supply voltage: 2.5 V to 5.5 V

Improved immunity against ambient light

Insensitive to supply voltage ripple and noise

Material categorization: For definitions of compliance



Application

TV, VCR, AUDIO, SET TOP BOX

Home Appliances

Remote Control Equipment


Description

These products are miniaturized receivers for infrared remote control systems. A PIN diode and a preamplifier are assembled on a lead frame, the epoxy package acts as an IR filter.

The demodulated output signal can be directly decoded by a microprocessor. The HX1838 is compatible with all common IR remote control data formats and can suppress almost all spurious pulses from energy saving fluorescent lamps.


This component has not been qualified according to automotive specifications.

◆ Block Diagram

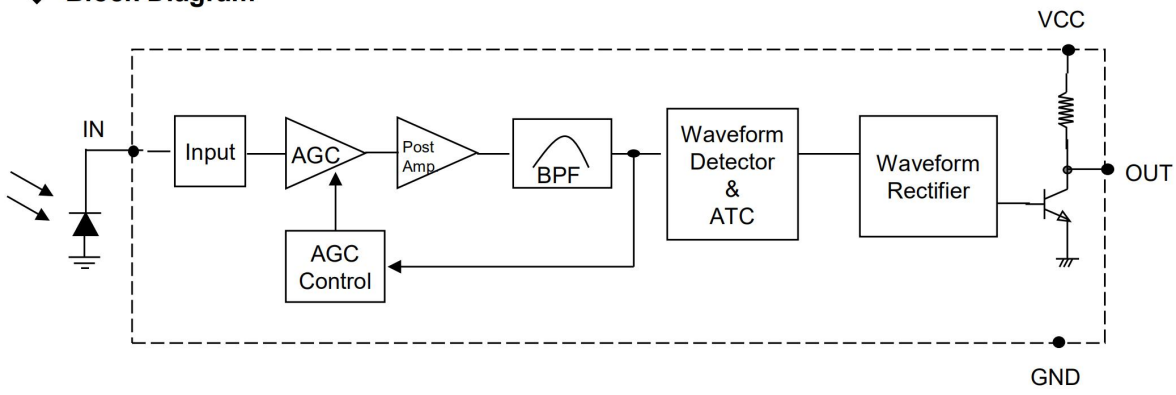

© 2019 SIVAGO SEMICONDUCTOR CO.,LTD ALL RIGHTS RESERVED.

PACKAGE DIMENSIONS

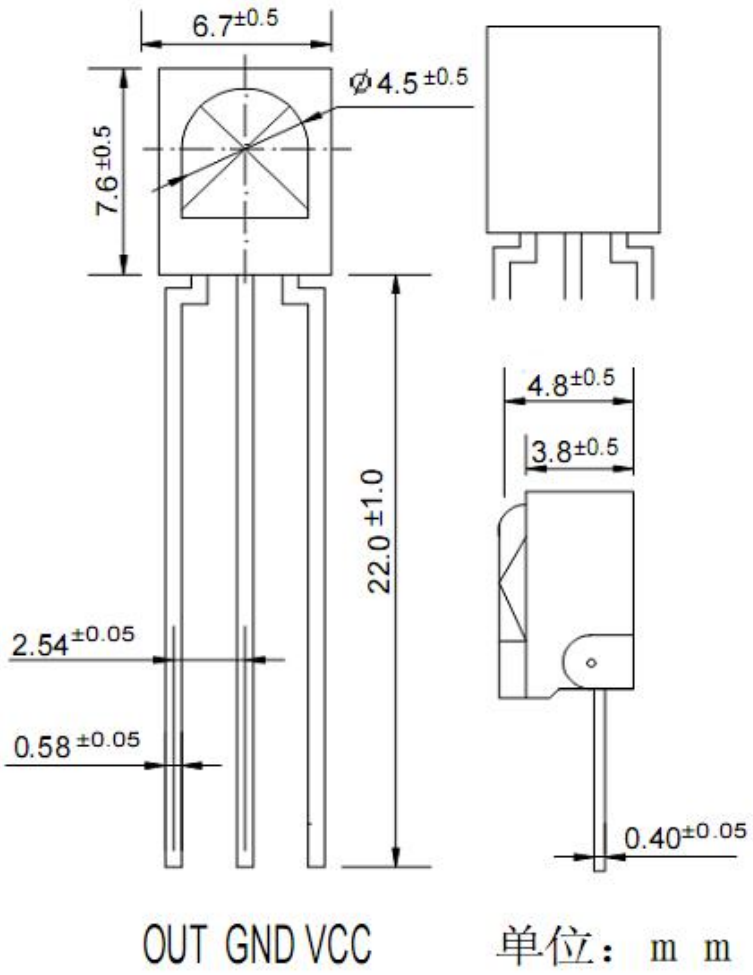

NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is ±0.2mm(.010") unless otherwise noted.
3. Lead spacing is measured where the leads emerge from the package.

© 2019 SIVAGO SEMICONDUCTOR CO.,LTD ALL RIGHTS RESERVED.

Absolute Maximum Ratings (T_a=25°C)

Parameter	Symbol	Rating	Unit
Supply Voltage	Vcc	6	V
Operating Temperature	Topr	-25 ~ +85	℃
Storage Temperature	Tstg	-40 ~ +85	℃
Soldering Temperature *1	Tsol	260	℃

*1 4mm from mold body less than 10 seconds

Electro-Optical Characteristics (Ta=25℃ and Vcc=3.0V)


Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Consumption Current	Icc	---	---	2	mA	No signal input
B.P.F Center Frequency	Fo	---	38	---	KHz	
Peak Wavelength	λ_p	---	940	---	nm	
Reception Distance	L_0	14	---	---	m	At the ray axis Notes 1
	L_{45}	6	---	---		
Half Angle(Horizontal)	Θ_h	---	45	---	deg	
Half Angle(Vertical)	Θ_v	---	45	---	deg	
High Level Pulse Width	T_H	400	---	800	μs	At the ray axis Notes 2
Low Level Pulse Width	T_L	400	---	800	μs	
High Level Output Voltage	V_H	2.7	---	---	V	
Low Level Output Voltage	V_L	---	0.2	0.5	V	

*2. The ray receiving surface at a vertex and relation to the ray axis in the range of θ=0° and θ=45°.
*3. A range from 30cm to the arrival distance. Average value of 50 pulses.

© 2019 SIVAGO SEMICONDUCTOR CO.,LTD ALL RIGHTS RESERVED.


Measurement Conditions (Ta=25°)

[Fig.1] Output Waveform (at freq.=37.9KHz)

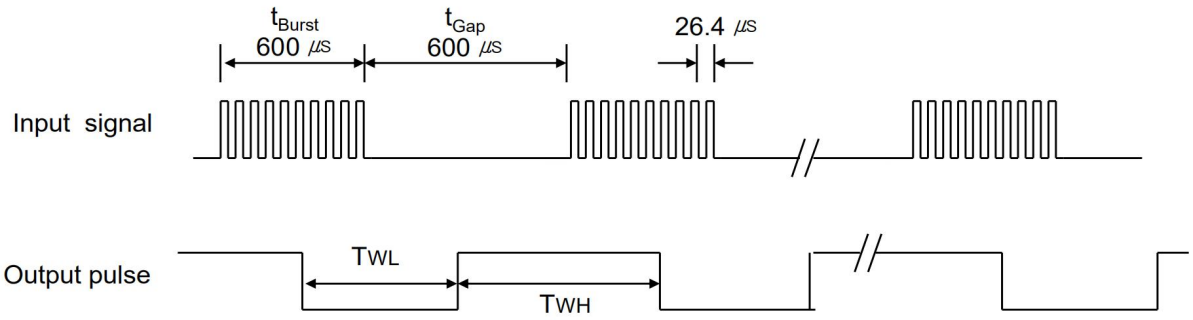


TWL = 400 μs ~ 800 μs , TWH = 400 μs ~ 800μs

[Fig.2] Transmitter

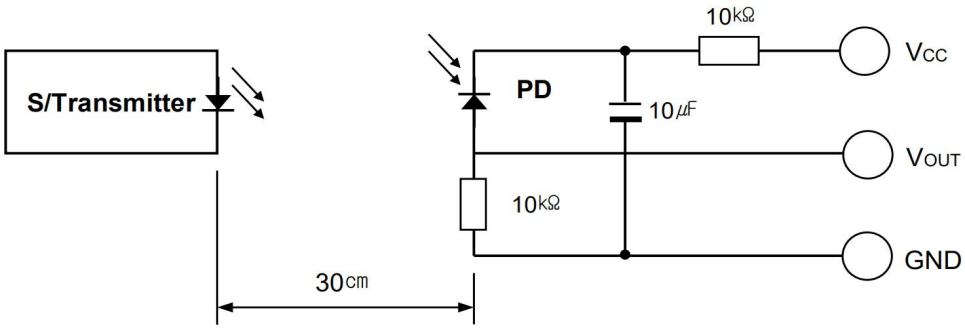

※ The specifications shall be satisfied under the following conditions. The standard transmitter shall be specified of the burst wave form adjusted to VOUT 200mVp-p upon Po measuring circuit Standard Transmitter

[Fig.3] Test condition of arrival distance

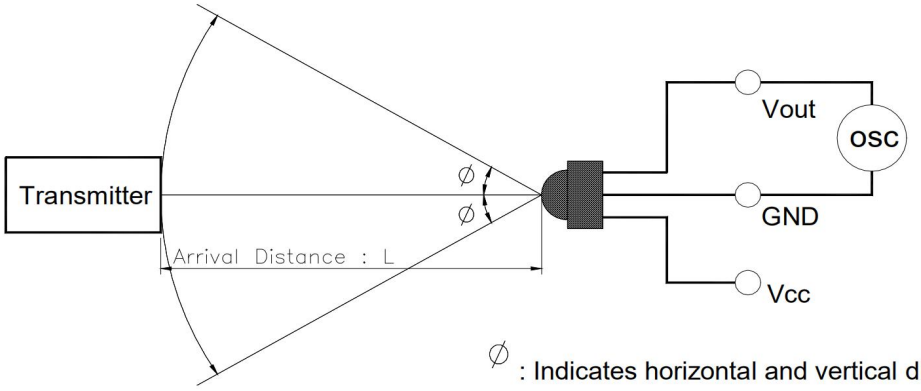

∅ : Indicates horizontal and vertical directions


[Measurement condition for arrival distance]

☞ Ambient light source : Detecting surface illumination shall be irradiate 200±50Lux under ordinary white fluorescence lamp without high frequency lighting


© 2019 SIVAGO SEMICONDUCTOR CO.,LTD ALL RIGHTS RESERVED.

Electrical / Optical Characteristics (Ta=25˚)


[Fig.4] Supply Current vs. Voltage

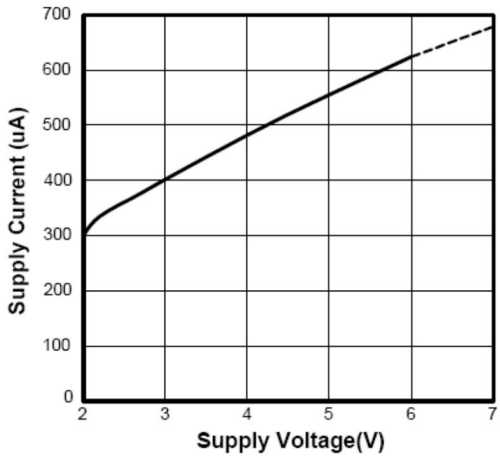


[Fig.5] Relative Spectral Sensitivity

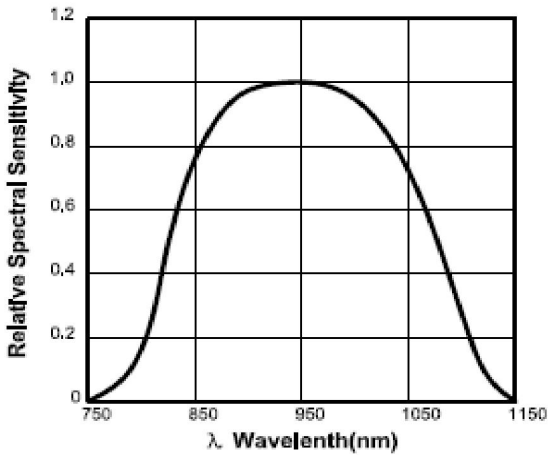


[Fig.6] Output Pulse Width vs. Distance

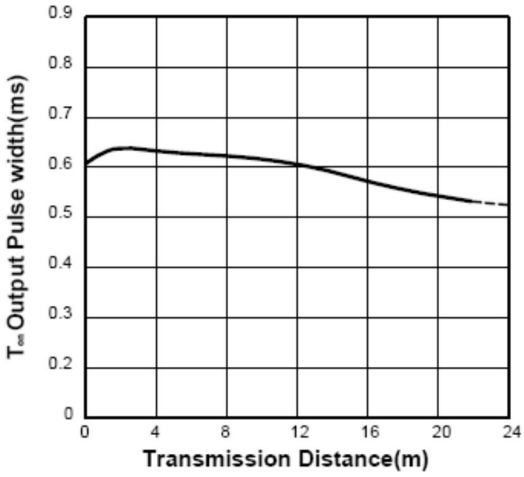

[Fig.7] Directivity

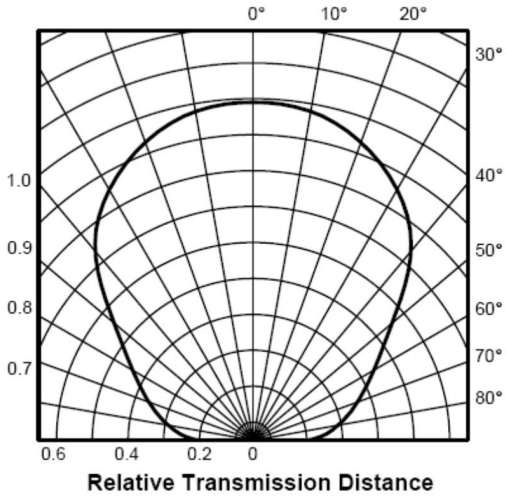

[Fig.8] B.P.F Fc Curve

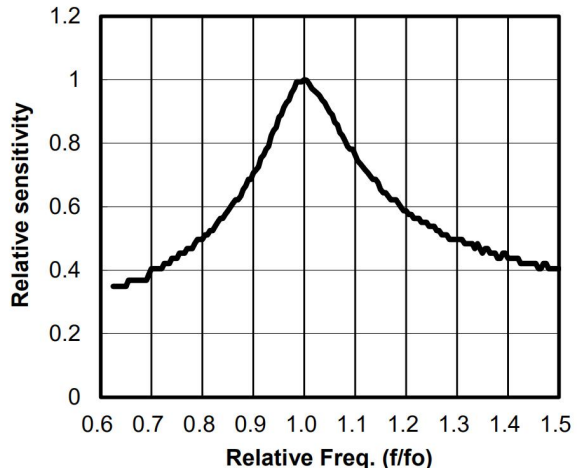

ESD Test Results


Parameter	Specification	Results
Machine Model	Min ±200V	> ±400V
Human Body Model	Min ±2000V	> ±4000V
Charged Device Model	Min ±400V	> ±600V

© 2019 SIVAGO SEMICONDUCTOR CO.,LTD ALL RIGHTS RESERVED.

Item	Symbol	Time
Minimum Data word length	-	Max. 100ms
Minimum Burst length	t_{Burst}	Min. 300us
Minimum Gap Time	t_{Gap}	Min. 350us
Minimum data pause time	t_{Pause}	Min. 50ms
Required data pause time	$t_{Pause} > \{ (\sum tBurst * 2) / 2.5 \} + 30$	

* note 1)
: t_{Pause_min} Could be changed by different data word format.
Therefore, for new application on sets please refer to "Required data pause time(t_{Pause})" on above.

[Fig. 9] Data Signal diagram

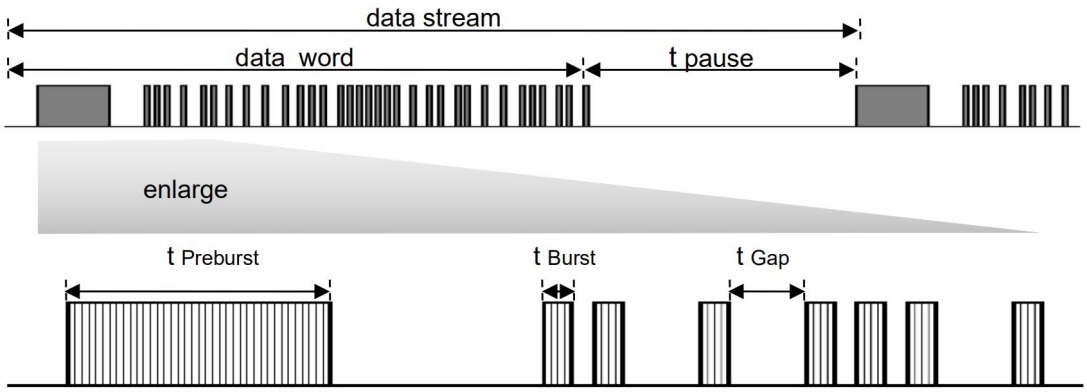


- t Burst ; length of a burst in pulses of the carrier frequency.
- t Gap ; length of the gap between two burst in pulses of carrier.
- t pause ; length of the pause between two data words.
- tPreburst ; lead code of data word

External Application Circuit - Power Noise reduction & ESD Protection

A further influence to the IR receiver modules may come from a supply voltage which is not stable. Such a disturbed supply voltage can caused by switching power supply.
which is not filtered well or by other components in the circuit which produced spikes on the supply line.
This disturbed supply will reduce the sensitivity of receiver modules.
This application circuit will filter the disturbed supply voltage.

[Fig 10] Application for power supply ripple suppression

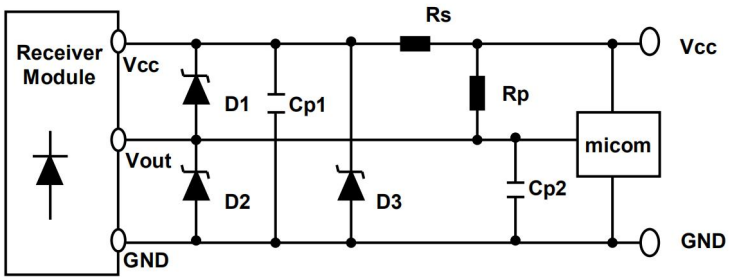

Component	Recommend
1) Rs	Typ. 100ohm (47 Ω~470Ω)
2) Cp1	Typ. 100uF (47uF~100uF)
3) Rp	Optional (10kΩ or more)
4) Cp2	Typ. 1nF (1nF ~ 10nF)
5) D1~D3	Zener diode or TVS (ESD Protection device)

© 2019 SIVAGO SEMICONDUCTOR CO.,LTD ALL RIGHTS RESERVED.

Reliability Test Items


Parameter	Test conditions		Remark
High Temperature	Ta=+85, Vcc=5.0V	t=240h	※1, ※2
Low Temperature	Ta=-30, Vcc=5.0V	t=240h	※1, ※2
High Temp./ High Humidity	Ta=+85℃ 85%RH, Vcc=5.0V	t=240h	※1, ※2
Heat Cycle	Ta=-20℃(0.5h) to +85℃(0.5h)	20 cycle	※2, ※3
Fall Test	Height=75cm, 3 times		※4

※ 1. Supply voltage of load test is 5V.
※ 2. Electro-optical characteristics shall be satisfied after leaving 2 hours in the normal condition.
※ 3. Heat cycle test shall repeat above condition 20 times under no load.
※ 4. The test devices shall be dropped three time on the hard wooden board from a height of 75㎝.

Material Configuration

Parameter	Configuration	Remark
IC	Silicon(99%)	
Photo diode	Silicon(99%)	
Lead frame	Copper(99.5%), Silver(0.5%)	
Epoxy resin	Resin(55.5%), Hardener(45.5%)	
Silver epoxy	Silver(80%), Resin(10%), Hardener(10%)	
Bond wire	Gold(99.99%)	

Lead(Pb)-Free Reflow Solder Profile

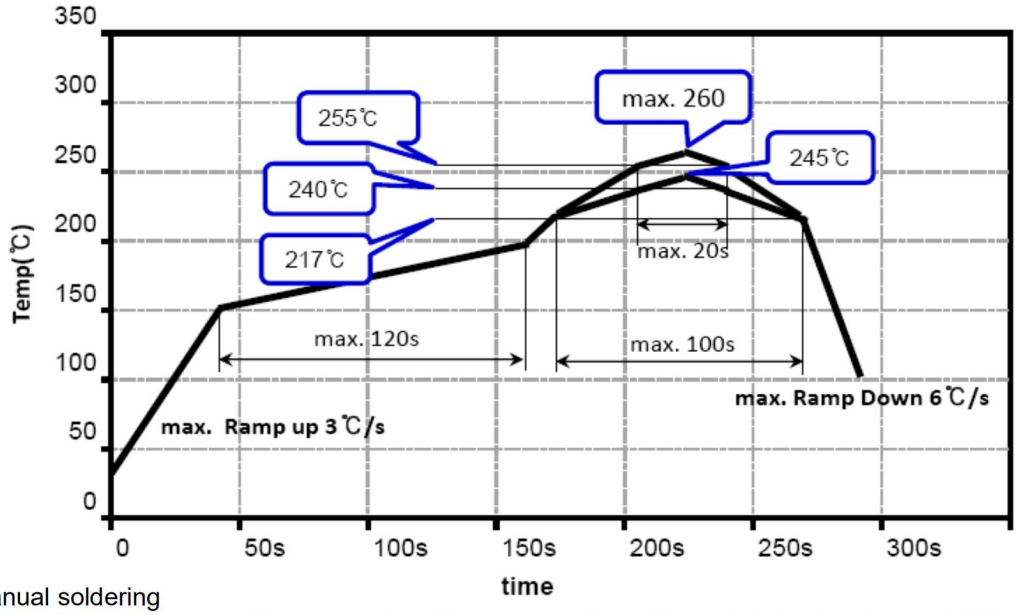

※ Manual soldering
Use a soldering iron of 25W or less. Adjust the temperature of the soldering iron below 260℃.

© 2019 SIVAGO SEMICONDUCTOR CO.,LTD ALL RIGHTS RESERVED.

Packing Quantity Specification

1. 250Pcs/1Bag,20 Bag/1Box

2. 4Boxes/1Carton

Label Form Specification



- PRODUCT: Part Number
- CODE NO.: Product Serial Number
- QTY: Packing Quantity
- LOT No: Lot Number
- REMARKS:Remarks

© 2019 SIVAGO SEMICONDUCTOR CO.,LTD ALL RIGHTS RESERVED.

Legal Disclaimer Notice

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

SIVAGO SEMICONDUCTOR CO.,LTD its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively,"SIVAGO"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

SIVAGO makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, SIVAGO disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special,consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on SIVAGO's knowledge of typical requirements that are often placed on SIVAGO products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify SIVAGO's terms and conditions of purchase,including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, SIVAGO products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the SIVAGO product could result in personal injury or death.Customers using or selling SIVAGO products not expressly indicated for use in such applications do so at their own risk.Please contact authorized SIVAGO personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of SIVAGO. Product names and markings noted herein may be trademarks of their respective owners.

© 2019 SIVAGO SEMICONDUCTOR CO.,LTD ALL RIGHTS RESERVED.